Tables with electric lifting column for eamination, treatment and therapy

DEWERT
Präzisions-Stahlrohrmöbel

Series 6000E

2022.1

German manufacture

with 2-sectioned lying surface

with inclination adjustment

with 5-sectioned lying surface

suitale for C-arm

Tables for surgery and hospital

German manufacture

Series 6000E - Tables with electric lifting column

Content

Good reasons for a table with electric lifting column 3

Tables with electric lifting column

2-sectioned tables with electric lifting column:

- Model 6000E 6
- Model 6050E
  with inclination adjustment 8

5-sectioned tables with electric lifting column:

- Model 6070E 10
- Model 6075E
  with inclination adjustment 12
- Model 6080E 14
- Model 6085E
  with inclination adjustment 16

2-sectioned tables with electric lifting column, suitable for C-arm:

- Model 6100E 18

You will find the whole Dewert product range with additional articles and equipment on our website and in our further catalogues.
We look forward to hear from you!



Series 6000E - Tables with electric lifting column

Good reasons for a table with electric lifting column

DEWERT Präzisions-Stahlrohrmöbel

Electric motorized height adjustment by electric lifting column



- Smooth height adjustment by integrated high-performance AC-motor with a pressure capacity of 3000 N
- Constant adjustment speed even in case of high load
- EPR-safety power cable with strain relief, lenght: 4 m
- Integrated safety device: Activation of drive by a double tip, automatic block in case of no use according to newest advice of BfArM
- High load capacity

Dewert-hygiene-equipment

Enables optimal cleaning and disinfection

- Hinge lid made of identical upholstery covering

- Artificial leather underneath the upholstery
- Vent holes underneath the upholstery, closed by special caps with valve function

- Easy hygiene because of an open construction: good accessibility of components, no plastic coverings which are breakable in the ageing process

- Option: Innovative artificial leather Skai® Toronto EN with staynu

Series 6000E - Tables with electric lifting column

Good reasons for a table with electric lifting column

Durable ✓

Robust ✓

Easy-care ✓

Smooth height adjustment ✓

Free space below lying surface ✓

Proven Dewert-quality ✓

Universal use ✓

Model 6100E additionally:
Suitable for C-arm (vertical X-ray) ✓

Technology:



- Large free space below the lying surface due to lifting column arranged in the middle or on one side, depending on the model
- Large cross section of column and precise guidance ensure tip-resistant operation
- Covering of the column made of 3 telescope sliding aluminium sections, silver anodized
- High torsional stiffness by using thick-walled rectangular steel tubes for under and upper frame
- Widely-spaced feet and a high dead weight guarantee stability
- Robust frame construction which is proven in demanding everyday life of hospitals for years
- Load capacity depending on the model

German manufacture

Upholstery:

- Thickness of upholstery: 60 mm
- Multiple glued, high-strength laminated wood panel (thickness: 18 mm) no breaking chipboards in case of pressure on the edges

- Two-layer homogenous polyurethane foam, density 46 and 75, Ökotex-certified
- 2 different variants for artificial leather eligible for upholstery covering:
  - Skai® Pandoria Plus with velvet-smooth surface
  - Skai® Toronto EN with innovative staynu-technology

Cleaning kit for Skai products
(Art. no. 050-1000)
Consists of:
- Spray bottle with 200 ml special Skai cleansing agent
- 1 microfibre care cloth 40 x 40 cm

Series 6000E - Tables with electric lifting column

Good reasons for a table with electric lifting column

... with 2-sectioned or 5-sectioned lying surface:

- Head part stepless positive and negative adjustable
- Pressure stable gas springs ensures working at the head part and foot part without vibrations

- 5-sectioned lying surface in addition:

  → The upholstery is in aesthetic design with tapering from back part to end of head and foot part

  → Back part stepless positive and negative adjustable, by adjusting the back part, positioning of head part is changing as well

  → 2-sectioned foot part, each leg part individually stepless adjustable

  → Adjustment of all sections of lying surface is independent from height

... with 2-sectioned or 5-sectioned lying surface and inclination adjustment:

- Lying surface is adjustable to inclined position (Trendelenburg) till 12° by electric motor der Lying surface bis 12°, measured in horizontal positioning of all segments
- The electric motor to adjust lying surface is controlled by 1 hand switch

... with 2-sectioned lying surface, suitable for C-arm:

- Head part stepless positive and negative adjustable (option: without head part)
- Electric lifting column positioned on one side, frame with high material thickness
- Lying surface with area which is able to be x-rayed (from end of head part), suitable for chest and pevic regions, length: 1000 mm x width: 650 mm

Series 6000E

2-sectioned table with electric lifting column

... for examination, treatment

Model 6000-03E and 6001-03E white aluminium powder coated (RAL 9006)
Model 6000-04E and 6001-04E silver aluminium powder coated (RAL 9007)

▶Model 6805-..XLE corresponds with model 6000-..XLE, but with nose opening



German manufacture

Both pictures:
Model 6000-04XLE
with options: Movable on twin castors with central lock (1048), paper roll holder (1270K);
upholstery colour:
64-717 deep sea

Basic equipment:

- Table not movable, including height adjustment screws to compensate for uneven ground
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Integrated safety function for automatic blocking of electromotive drive
- Dewert-hygiene-equipment

Upholstery:

Lying surface 2-sectioned:

- Head part stepless up- (+45°) and downwards (-35°) adjustable by gas spring
- Length head part: 550 mm
- Fixed foot part
- Length foot part: 1400 mm
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 560 mm to 960 mm in 24 Sec.
  by integrated AC-motor with a pressure capacity of 3000 N
- Width of lying surface: Model 6000-..E: 700 mm | Model 6001-..E: 800 mm
- Length of lying surface: 1950 mm
- Load capacity: 250 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical
adjustment

Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Paper roll holder

Art. no. 1270K / 1280K
Paper roll holder, mounted under head part (not protruding), for width 700 mm / 800 mm

Art. no. 1270K/F / 1280K/F
Paper roll holder, mounted at foot part (70 mm protruding), for width 700 mm / 800 mm

Nose opening

Art. no. 1610
Nose opening, in head part

Art. no. 1620
Upholstery part to close

Add-on elements

Art. no. 1410
1 piece of side rail, length: 350 mm

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1080
1 side guard lateral lowerable, chromium-plated, completely made of steel tube, length: 1060 mm

Art. no. 1040
1 side guard tiltable, chromium-plated, completely made of steel tube, length: 700 mm

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Wall protection bumpers

Art. no. 1175 / 1176
4 wall protection bumpers Ø 150 mm, including mounting, for width 700 mm / 800 mm

Upholstery options

Art. no. 1770 / 1780
Soft covering for pleasant resting comfort, for width 700 mm / 800 mm, thickness 80 mm

Art. no. 1772 / 1782
Upholstery medium-soft (cold foam cover), for width 700 mm / 800 mm, thickness 70 mm

Series 6000E

2-sectioned table with electric lifting column

... for examination, treatment

Model 6050-03E and 6051-03E white aluminium powder coated (RAL 9006)
Model 6050-04E and 6051-04E silver aluminium powder coated (RAL 9007)

▶Model 6810-..XLE corresponds with modell 6050-..XLE, but with nose opening



German manufacture

All pictures:
Model 6050-04XLE
with options:
Movable on twin castors
with central lock (1048),
paper roll holder (1270K/F);
upholstery colour:
64-715 anthracite

Basic equipment:

- Table not movable, including height adjustment screws to compensate for uneven ground
- Long head part with half-round design
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Lying surface inclinable to 20° (Trendelenburg) by electromotive drive, operation by hand switch
- Integrated safety function for automatic blocking of electromotive drive
- Dewert-hygiene-equipment

Upholstery:

Lying surface 2-sectioned:

- Head part stepless up- (+75°) and downwards (-25°) adjustable by gas spring (sitting position)
- Length head part: 750 mm
- Fixed foot part
- Length foot part: 1200 mm
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 560 mm to 960 mm in 24 Sec.
  by integrated AC-motor with a pressure capacity of 3000 N
- Lying surface inclinable to 20° (Trendelenburg) by electromotive drive
- Width of lying surface: Model 6050-..E: 700 mm | Model 6051-..E: 800 mm
- Length of lying surface: 1950 mm
- Load capacity: 250 kg; according to IEC 60601 tested with fourfold static load

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology



Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Paper roll holder

Art. no. 1270K / 1280K
Paper roll holder, mounted under head part (not protruding), for width 700 mm / 800 mm

Art. no. 1270K/F / 1280K/F
Paper roll holder, mounted at foot part (70 mm protruding), for width 700 mm / 800 mm

Nose opening

Art. no. 1610
Nose opening, in head part

Art. no. 1620
Upholstery part to close

Add-on elements

Art. no. 1410
1 piece of side rail, length: 350 mm

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1080-60
1 side guard lateral lowerable, chromium-plated, completely made of steel tube, length: 820 mm

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Wall protection bumpers

Art. no. 1175 / 1176
4 wall protection bumpers Ø 150 mm, including mounting, for width 700 mm / 800 mm

Upholstery options

Art. no. 1770 / 1780
Soft covering for pleasant resting comfort, for width 700 mm / 800 mm, thickness 80 mm

Art. no. 1772 / 1782
Upholstery medium-soft (cold foam cover), for width 700 mm / 800 mm, thickness 70 mm

Series 6000E

5-sectioned table with electric lifting column

... for examination, treatment

Electric motorized



height adjustment

Model 6070-03E white aluminium powder coated (RAL 9006)
Model 6070-04E silver aluminium powder coated (RAL 9007)

▶Model 6870-..XLE corresponds with model 6070-..XLE

German manufacture

All pictures:
Model 6070-04XLE
with option: Movable on twin castors with central lock (1048);
upholstery colour:
64-715 anthracite

Basic equipment:

- Lying surface 5-sectioned,
  adjustment of all sections of lying surface is independent from height
- Table not movable, including height adjustment screws to compensate for uneven ground
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Integrated safety function for automatic blocking of electromotive drive
- Dewert-hygiene-equipment

Upholstery:

Lying surface 5-sectioned:

- Head part stepless up- (+ 35°) and downwards (-30°) adjustable by gas spring
- Length head part: 360 mm, with nose opening and upholstery part to close
- Back part stepless up- (+ 70°) and downwards (-15°) adjustable by gas spring | Length back part: 570 mm
- By adjusting the back part, positioning of head part is changing as well
- Fixed seat part, length: 460 mm
- Foot part: 2-sectioned, each leg part individually stepless adjustable (-50° - +50°) by gas spring
- Length foot part: 650 mm, width foot part: 350 mm
- The upholstery is in aesthetic design with tapering from back part to end of head and foot part
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 560 mm to 960 mm in 24 Sec.
  by integrated AC-motor with a pressure capacity of 3000 N
- Width of lying surface: 700 mm
- Length of lying surface: 2040 mm
- Load capacity: 220 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical

adjustment

Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Paper roll holder

Art. no. 1270K
Paper roll holder, mounted under head part (not protruding), for width 700 mm

Nose opening

Art. no. 1615-EF
Loss of nose opening and upholstery part to close

Upholstery options

Art. no. 1770
Soft covering for pleasant resting comfort, for width 700 mm, thickness 80 mm

Art. no. 1772
Upholstery medium-soft (cold foam cover), for width 700 mm, thickness 70 mm

Add-on elements

Art. no. 1410
1 piece of side rail

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Foot part options

Art. no. G101
1-sectioned foot part

Series 6000E

5-sectioned table with electric lifting column

... for examination, treatment

Electric motorized



height adjustment

Model 6075-03E white aluminium powder coated (RAL 9006)
Model 6075-04E silver aluminium powder coated (RAL 9007)

▶Model 6875-..XLE corresponds with model 6075-..XLE

German manufacture

Big picture:
Model 6075-04XLE
with option: Movable on comfort twin castors with central lock (1048);
upholstery colour:
64-702 white

Basic equipment:

- Lying surface 5-sectioned,
  adjustment of all sections of lying surface is independent from height
- Table not movable, including height adjustment screws to compensate for uneven ground
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Lying surface inclinable to 12° (Trendelenburg) by electromotive drive, operation by hand switch
- Integrated safety function for automatic blocking of electromotive drives
- Dewert-hygiene-equipment

Upholstery:

Lying surface 5-sectioned:

- Head part stepless up- (+ 35°) and downwards (-30°) adjustable by gas spring
- Length head part: 360 mm, with nose opening and upholstery part to close
- Back part stepless up- (+ 70°) and downwards (-15°) adjustable by gas spring | Length back part: 570 mm
- By adjusting the back part, positioning of head part is changing as well
- Fixed seat part, length seat part: 460 mm
- Foot part: 2-sectioned, each leg part individually stepless adjustable (-50° - +50°) by gas spring
- Length foot part: 650 mm, width foot part: 350 mm
- The upholstery is in aesthetic design with tapering from back part to end of head and foot part
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 560 mm to 960 mm in 24 Sec.
  by integrated AC-motor with a pressure capacity of 3000 N
- Lying surface inclinable to 12° (Trendelenburg) by electromotive drive
- Width of lying surface: 700 mm | Length of lying surface: 2040 mm
- Load capacity: 220 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical



adjustment

Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Nose opening

Art. no. 1615-EF
Loss of nose opening and upholstery part to close

Upholstery options

Art. no. 1770
Soft covering for pleasant resting comfort, for width 700 mm, thickness 80 mm

Art. no. 1772
Upholstery medium-soft (cold foam cover), for width 700 mm, thickness 70 mm

Add-on elements

Art. no. 1410
1 piece of side rail

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Foot part options

Art. no. G101
1-sectioned foot part

Series 6000E

5-sectioned table with electric lifting column

... for examination, treatment



Model 6080-03E white aluminium powder coated (RAL 9006)
Model 6080-04E silver aluminium powder coated (RAL 9007)

▶Model 6880-..XLE corresponds with model 6080-..XLE

German manufacture

without picture

Basic equipment:

- Lying surface 5-sectioned, adjustment of all sections of lying surface is independent from height
- Foot parts almost vertical tiltable for good sitting position
- Table not movable, including height adjustment screws to compensate for uneven ground
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Integrated safety function for automatic blocking of electromotive drive
- Dewert-hygiene-equipment

Upholstery:

Lying surface 5-sectioned:

- Head part stepless up- (+ 35°) and downwards (-30°) adjustable by gas spring
- Length head part: 360 mm, with nose opening and upholstery part to close
- Back part stepless up- (+ 70°) and downwards (-15°) adjustable by gas spring | Length back part: 570 mm
- By adjusting the back part, positioning of head part is changing as well
- Fixed seat part, length seat part: 460 mm
- Foot part: 2-sectioned, each leg part individually stepless adjustable (-85° - +20°) by gas spring, almost vertical tiltable, a good sitting position is possible | Length foot part: 550 mm, width foot part: 350 mm
- The upholstery is in aesthetic design with tapering from back part to end of head and foot part
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 620 mm to 1.020 mm in 24 Sec.
  by integrated AC-motor with a pressure capacity of 3000 N
- Width of lying surface: 700 mm
- Length of lying surface: 1950 mm
- Load capacity: 220 kg; according to IEC 60601 tested with fourfold static load

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology



Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Paper roll holder

Art. no. 1270K
Paper roll holder, mounted under head part (not protruding), for width 700 mm

Nose opening

Art. no. 1615-EF
Loss of nose opening and upholstery part to close

Upholstery options

Art. no. 1770
Soft covering for pleasant resting comfort, for width 700 mm, thickness 80 mm

Art. no. 1772
Upholstery medium-soft (cold foam cover), for width 700 mm, thickness 70 mm

Add-on elements

Art. no. 1410
1 piece of side rail

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Foot part options

Art. no. G101
1-sectioned foot part

Series 6000E

5-sectioned table with electric lifting column

... for examination, treatment

Electric motorized



height adjustment

Model 6085-03E white aluminium powder coated (RAL 9006)
Model 6085-04E silver aluminium powder coated (RAL 9007)
▶Model 6885-..XLE corresponds with model 6085-..XLE

German manufacture

Model 6085-04XLE, blue:
with options: Movable on comfort twin castors with central lock (1048);
upholsery colour: 64-174 sky

Model 6085-04XLE, grey:
with options: Movable on comfort twin castors with central lock (1048),
1-sectioned foot part (G101);
upholstery colour:
64-712 sate grey

Basic equipment:

- Lying surface 5-sectioned, adjustment of all sections of lying surface is independent from height
- Foot parts almost vertical tiltable for good sitting position
- Table not movable, including height adjustment screws to compensate for uneven ground
- Electric motorized height adjustment by electric lifting column, arranged in the middle
- Electromotive drive control by foot switch (option: hand switch)
- Lying surface inclinable to 12° (Trendelenburg) by electromotive drive, operation by hand switch
- Integrated safety function for automatic blocking of electromotive drives
- Dewert-hygiene-equipment

Upholstery:

Lying surface 5-sectioned:

- Head part stepless up- (+ 35°) and downwards (-30°) adjustable by gas spring
- Length head part: 360 mm, with nose opening and upholstery part to close
- Back part stepless up- (+ 70°) and downwards (-15°) adjustable by gas spring | Length back part: 570 mm
- By adjusting the back part, positioning of head part is changing as well
- Fixed seat part, length seat part: 460 mm
- Foot part: 2-sectioned, each leg part individually stepless adjustable (-85° - +20°) by gas spring, almost vertical tiltable, a good sitting position is possible | Length foot part: 550 mm, width foot part: 350 mm
- The upholstery is in aesthetic design with tapering from back part to end of head and foot part
- Upholstery thickness: 60 mm

Technical data:

- Electronical height adjustment: 620 mm to 1020 mm in 24 Sec. by integrated AC-motor with a pressure capacity of 3000 N
- Lying surface inclinable to 12° (Trendelenburg) by electromotive drive
- Width of lying surface: 700 mm | Length of lying surface: 1950 mm
- Load capacity: 220 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical



adjustment

Available as an option (see pricelist for additional options)

Mobility

Art. no. 1048
Movable on twin castors with central lock, Ø 100 mm, underpart lowered, basic height +20 mm

Art. no. 1047
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering, underpart lowered, basic height +20 mm

Additional motor control options

Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten

Art. no. 1910E
1 foot switch (low voltage)

Additional safety options

Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Nose opening

Art. no. 1615-EF
Loss of nose opening and upholstery part to close

Upholstery options

Art. no. 1770
Soft covering for pleasant resting comfort, for width 700 mm, thickness 80 mm

Art. no. 1772
Upholstery medium-soft (cold foam cover), for width 700 mm, thickness 70 mm

Add-on elements

Art. no. 1410
1 piece of side rail

Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm

Arm rests

Art. no. 1440
Arm rest for side rail, without attachment clamp, swivelling and removable, additional revolving and tiltable

Side guards

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Foot part options

Art. no. G101
1-sectioned foot part

Series 6000E

2-sectioned table with electric lifting column

Suitable for C-arm (vertical X-ray)

Model 6100-03E white aluminium powder coated (RAL 9006)
Model 6100-04E silver aluminium powder coated (RAL 9007)



German manufacture

Model 6100-04XLE
with option:
Paper roll holder (1270K/F);
upholstery colour:
64-154 limone

Table in highest position

Table in lowest position

Basic equipment:

- Movable on twin castors, Ø 100 mm, with central lock
- Electric motorized height adjustment by electric lifting column, arranged on one side
- Electromotive drive control by 1 foot switch and 1 hand switch
- Integrated safety function for automatic blocking of electromotive drive
- Dewert-hygiene-equipment

Upholstery:

Lying surface 2-sectioned:

- Head part stepless up- (+ 40°) and downwards (-30°) adjustable by gas spring
- Length head part: 420 mm
- Fixed foot part, length foot part: 1580 mm
- Lying surface with area which is able to be x-rayed (from end of head part), suitable for chest and pevic regions, length: 1040 mm x width: 690 mm
- Option: Different measures, lying surface 1-sectioned, also with HPL board and removable upholstery, possible
- Upholstery thickness: 60 mm

6100-04E with option: Lying surface 1-sectioned (028), paper roll holder (1280K/F)

Technical data:

- Electronical height adjustment: 620 mm to 1020 mm in 24 Sec. by integrated AC-motor with a pressure capacity of 3000 N
- Width of lying surface: 800 mm
- Length of lying surface: 2000 mm
- Load capacity: 200 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical
adjustment

Available as an option (see pricelist for additional options)

Upholstery options

Art. no. 029
Detachable matress (1-sectioned) with HPL board, able to be X-rayed, matress and board with nose opening and upholstery part to close, limited ability to be X-rayed in section of nose opening
measures: 1950 mm x 730 mm
area which is able to be X-rayed: 1340 x 650 mm

Art. no. 028
Lying surface 1-sectioned, width: 730 mm
area which is able to be X-rayed: 1360 x 600 mm

Art. no. 028-10
Lying surface 1-sectioned, width: 800 mm
area which is able to be X-rayed: 1360 x 670 mm

Paper roll holder

Art. no. 1280K/F
Paper roll holder, mounted at foot part, for width 800 mm

Nose opening

Art. no. 1610
Nose opening, in head part

Art. no. 1620
Upholstery part to close

Add-on elements

Art. no. 1410
1 piece of side rail, length: 350 mm

Art. no. 1420
1 piece of side rail, length: 1300 mm

Side guards

Art. no. 1080
1 side guard lateral lowerable, chromium-plated, completely made of steel tube, length: 1060 mm

Art. no. 1005
1 side guard to fit on side rail, with attachment clamp, chromium-plated, length: 800 mm

Special feature: Suitable for C-arm (vertical X-ray):

- Easy operation of height adjustment due to extension arm for foot switch at head
- Lying surface:
  With area which is able to be X-rayed (from end of head part),
  suitable for chest and pevic regions (not head part),
  length: 1000 mm x width: 650 mm

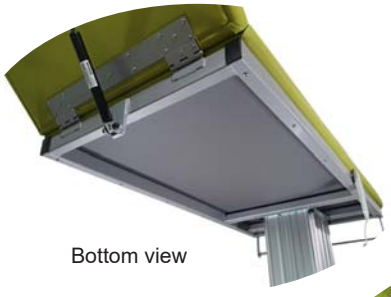

Bottom view

K.H. Dewert GmbH
Vollmestraße 7
33649 Bielefeld
Germany

Post office 14 40 28
33634 Bielefeld
Germany

Phone + 49 (0) 5 21 / 4 00 27-0
Fax + 49 (0) 5 21 / 4 00 27-27

Internet: www.khdewert.de
E-Mail: info@khdewert.de
YouTube: K.H. Dewert

Tables with electric lifting column

for examination, treatment, therapy

06.2022_01

Tables for surgery and hospital | Series 6000E

German manufacture